



# Using Python @ NSC


## OS Python

- NSC's clusters have the CentOS standard Python 2.7.5 and Python 3.4.10 installed.

```
[x_abcde@tetalith]$ module purge
[x_abcde@tetalith]$ which python
/usr/bin/python
[x_abcde@tetalith]$ which python3
/usr/bin/python3
```

- Recommendation: don't use them

## Python modules

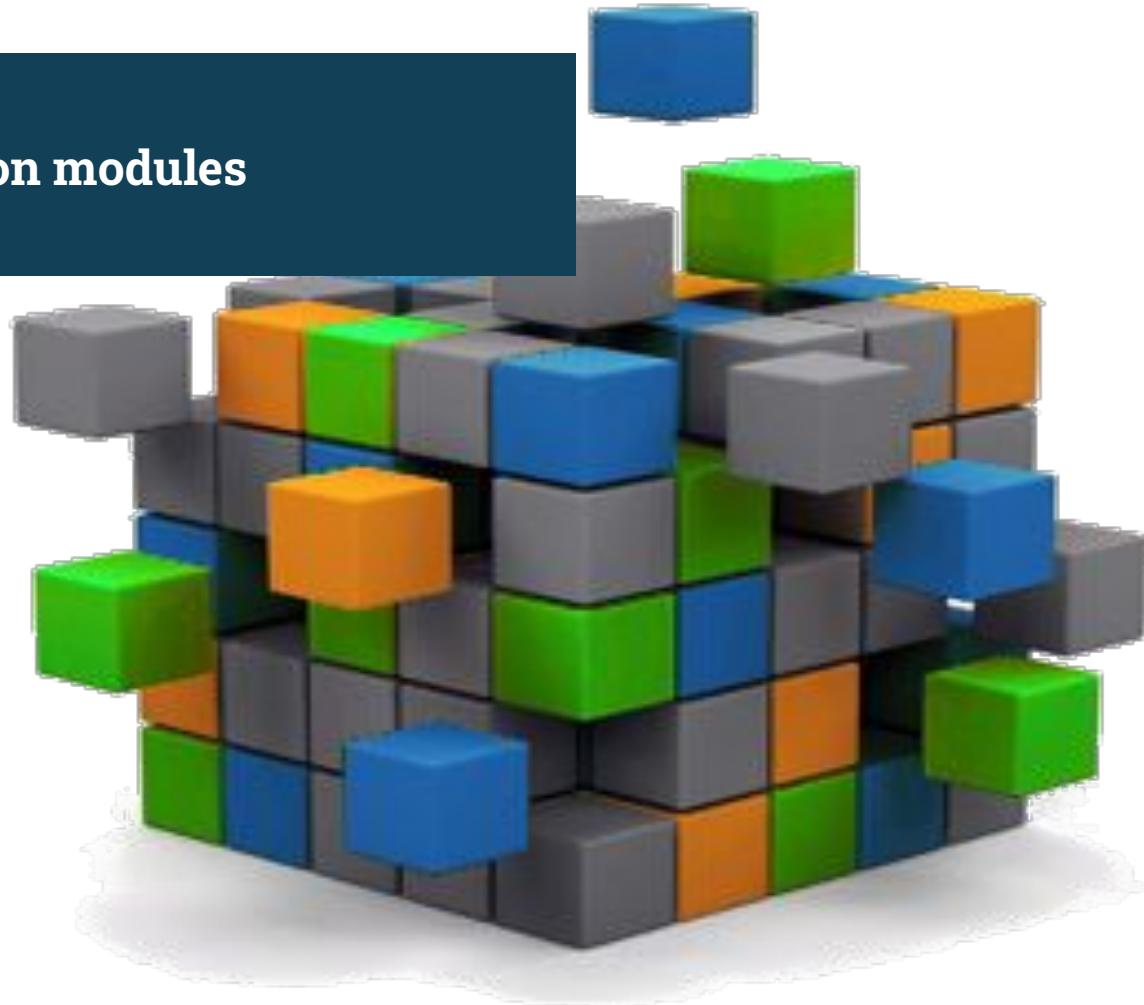

## Python modules

- Python modules provide access to a recent version of Python + scientific libraries: e.g. NumPy, SciPy, Matplotlib, Pandas etc

```
[x_abcde@tetralith] $ module avail Python/  
 . . .  
Python/recommendation          (D)  
Python/2.7.14-anaconda-5.0.1-nscl  
Python/2.7.14-nscl-gcc-2018a-eb  
 . . .  
Python/3.6.3-anaconda-5.0.1-nscl  
Python/3.6.4-nscl-intel-2018a-eb  
 . . .
```

## Python modules

- After loading a Python module, you will have a new Python installation in your PATH
- A range of scientific packages are also made available e.g. NumPy

```
[x_abcde@tetalith] $ module load Python/3.7.0-anaconda-5.3.0-extras-nscl
$ python
Python 3.7.0 (default, Jun 28 2018, 13:15:42)
[GCC 7.2.0] :: Anaconda, Inc. on linux
Type "help", "copyright", "credits" or "license" for more information.

>>> import numpy
>>> numpy.linspace(0, 2, 9)
array([0. , 0.25, 0.5 , 0.75, 1. , 1.25, 1.5 , 1.75, 2. ])
```

## Python modules

Three flavors of Python module

1. Python/x.y.z-nscX-toolchain
2. Python/x.y.z-env-nscX-toolchain
3. Python/x.y.z-anaconda-....

Some guidelines to help you choose a module:

- A. There are generally more packages included in the Anaconda installations
- B. If there are modules that only differ in the -nsc build/installation tag, then choose the one with the highest integer (e.g. nsc2 rather than nscl)

## Python modules

Check available packages in a module: Anaconda modules

To list the installed packages in an Anaconda Python installation, simply load the module and run: conda list.

If you are looking for a specific package, then pipe the output from `conda list` to `grep`:

```
[x_abcde@tetalith]$ module load Python/3.6.3-anaconda-5.0.1-nscl
[x_abcde@tetalith]$ conda list | grep -i scipy
scipy                      0.19.1          py36h9976243_3
```

## Python modules

Check available packages in a module: NSC build modules

To list the installed packages in a NSC build installation, simply load the module and run: pip list.

If you are looking for a specific package, then pipe the output from pip list to grep:

```
[x_abcde@tetalith]$ module load Python/3.6.4-nsc2-intel-2018a-eb  
[x_abcde@tetalith]$ pip list --format=legacy | grep -i scipy  
scipy (1.0.0)
```

# Managing your python environment



## Managing your python environment

- Python modules provide a set of common python packages.
- For technical reasons, we cannot install all the packages that everyone needs in the same module installation.
- Instead, we recommend that you install extra packages in your own user space using a **managed environment**.
- We support two options:
  1. anaconda
  2. virtualenv

## Managing your python environment: conda

- Use an **Anaconda** module for managing your conda environments (NOT Python/x.y.z-anaconda-...)

```
[x_abcde@tetralith]$ module load Anaconda/2021.05-nsc1
[x_abcde@tetralith]$ conda create -n myownenv python=3.8 pandas seaborn
[x_abcde@tetralith]$ conda activate myownenv
(myownenv) [x_abcde@tetralith]$ which python
    ~/.conda/envs/myownenv/bin/python
(myownenv) [x_abcde@tetralith]$ python
    Python 3.8.13 | packaged by conda-forge | (default, Mar 25 2022, 06:04:18)
    [GCC 10.3.0] on linux
    Type "help", "copyright", "credits" or "license" for more information.
    >>> import pandas
    >>> pandas.__version__
    '1.4.2'
```

## Managing your python environment: conda

- If you need to use the conda command for anything other than `conda list`, use an **Anaconda** module to create your own local conda environment.
- More detailed information: [Anaconda @ NSC](#)

## Managing your python environment: conda

- By default, your conda environments are installed in `$(HOME)/.conda`. If you have multiple conda environments here there is a risk of filling up your `$(HOME)` space.
  - There are ways to install conda environments outside `$(HOME)`, see [Python @ NSC](#)
- Mambaforge modules are available on Tetralith/Sigma as a “drop-in” replacement to Anaconda  
`Mambaforge/4.12.0-0-nsc1`

## Managing your python environment: `virtualenv`

- Use any of the `Python/x.y.z` modules for managing environments using `virtualenv`

```
[x_abcde@tetralith]$ module load Python/3.6.7-env-nscl-gcc-2018a-eb
[x_abcde@tetralith]$ virtualenv --system-site-packages myownvirtualenv
[x_abcde@tetralith]$ source myownvirtualenv/bin/activate
(myownvirtualenv) [x_abcde@tetralith]$ pip install python-hostlist
(myownvirtualenv) [x_abcde@tetralith]$ python
    Python 3.6.7 (default, Nov 26 2018, 16:42:15)
    [GCC 6.4.0] on linux
    Type "help", "copyright", "credits" or "license" for more information.
>>> import hostlist
>>> hostlist.__file__
'/home/x_abcde/myownvirtualenv/lib/python3.6/site-packages/hostlist.py'
```

## Installing packages that require compiling

- If you need to install a python package that requires *compiling*, then you shouldn't use a conda environment!
- Use a gcc/intel Python and corresponding buildenv modules
- Create a virtual environment for building and adding packages.

```
[x_abcde@tetralith] $ module load Python/3.6.7-env-nscl-gcc-2018a-eb
[x_abcde@tetralith] $ module load buildenv-gcc/2018a-eb
[x_abcde@tetralith] $ virtualenv --system-site-packages myownvirtualenv
[x_abcde@tetralith] $ source myownvirtualenv/bin/activate
(myownvirtualenv) [x_abcde@tetralith] $ ...
```

## Mixing conda and software compiled from source code or via pip

- It is possible to compile software in relation to Anaconda: either using the NSC-provided compilers or conda-forge package compilers – **but be careful!**
- Please read: [Anaconda @ NSC](#), section “Mixing conda and software compiled from source code or via pip“

jupyter notebooks



The Jupyter logo features the word "jupyter" in a large, dark gray sans-serif font, centered within a white circle. The circle is partially overlaid by two thick, orange curved bands that form a smile-like shape. The background of the slide is a dark teal color, with a vertical white line on the left side and a small green and blue vertical bar on the far left.

jupyter

## Jupyter notebooks

- Jupyter notebooks can be run on with the login nodes or compute nodes.
- Jupyter packages are included in the Python/x.y.z-anaconda-...-extras-nscl modules

```
[x_abcde@tetralith]$ module load Python/3.8.3-anaconda-2020.07-extras-nscl  
[x_abcde@tetralith]$ conda list | grep jupyter
```

...

- (or you can create and manage your own python environment that includes jupyter)

## Jupyter notebooks

- Recommendation: Use jupyter in combination with thinlinc.
  - E.g. on a login node, in a thinlnc terminal:

```
[x_abcd@tetalith]$ module load Python/3.8.3-anaconda-2020.07-extras-nscl  
[x_abcd@tetalith]$ jupyter-notebook  
[x_abcd@tetalith]$ ...
```

- Jupyter notebooks can also be used via an ssh tunnel

## mpi4py

- Python scripts that use mpi4py are now supported by the latest version of NSC's mpi launcher ([mpprun/4.3.0](#)).
  - E.g. interactive:

```
[x_abcde@tetralith]$ module load Python/3.6.7-env-nscl-gcc-2018a-eb
[x_abcde@tetralith]$ interactive -n 4 -A <my-project> -t 01:00:00
...
[x_abcde@n1234]$ mpprun python mpi4py-pythonscript.py
...
```

- where `mpi4py-pythonscript.py` includes, e.g.:

```
import mpi4py as MPI
```

## mpi4py

- You can also run in batch mode using a script something like:

```
#!/bin/bash
#SBATCH -A naiss2023-x-yyy
#SBATCH -n 4
#SBATCH -t 01:00:00
#SBATCH -J jobname

module load Python/3.6.7-env-nscl-gcc-2018a-eb
mpirun python mpi4py-pythonscript.py
```

## Final notes:

- Maintain separate python environments for separate work tasks
- Please do NOT use `pip install -local`
- Remove `conda init` from your `.bashrc` (and try to keep changes to `.bashrc` to a minimum)
- It is possible to use `conda install` and `pip install` in the same environment
  1. Create a conda environment using an Anaconda module
  2. `conda install pip`
  3. `pip install mypipmodule`